



# ISI-271THN



W x D x H

inch (mm)

15" (380) x 38" (972) x 39" (988)

## Feature



**SIMPLICITY**



**PERFORMANCE**



**RELIABILITY**



**EXCELLENT TASTE**



**Direct Motor Drive (operation)**

Less noise & Less vibration



**Agitator operation**

Keep ice cream mix liquid separation / Circulate the ice cream mix evenly for temperature maintenance



**Heat Treatment System (Pasteurization)**

Pasteurization involves heating dairy products for a period of time to kill bacteria, maintaining dairy products up to two weeks. You can also choose an automatic or manual pasteurization system.



**Mix Hopper**

One, 12.5 liter (3.3 gallon) / Maintain the temperature of mix, under 5°C (41°F) in Auto & Standby modes



**Artificial Intelligence Control System**

A.I Control System makes high quality soft serve ice cream.



**Powerful Production Capacity**

Oversized compressor cuts down on production time.



**Freezing Cylinder**

One, 2.7 liter (0.72 gallon) x 1EA



**Various Function**

Defrost / Regeneration / Boiling Function

## Dimensions


| Dimensions | Net              | Gross            |
|------------|------------------|------------------|
| Width      | 15" (380 mm)     | 16" (409 mm)     |
| Depth      | 38" (972 mm)     | 38" (969 mm)     |
| Height     | 39" (988 mm)     | 42" (1,077 mm)   |
| Weight     | 287 lbs (130 kg) | 331 lbs (150 kg) |

### Certification




# PREMIUM HEAT TREATMENT TABLE TYPE SOFT ICE CREAM MACHINE


## Dimension – Unit : mm (inch)

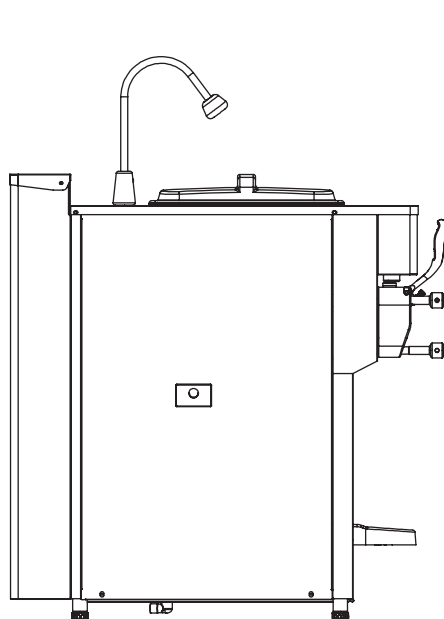

LEFT SIDE

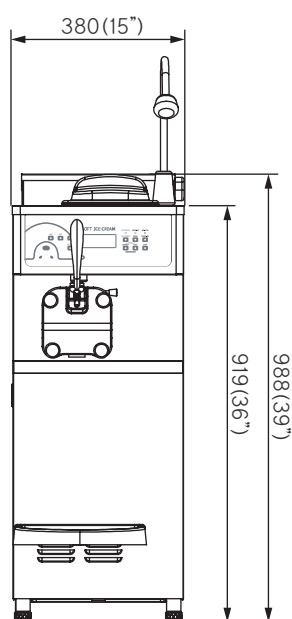

FRONT

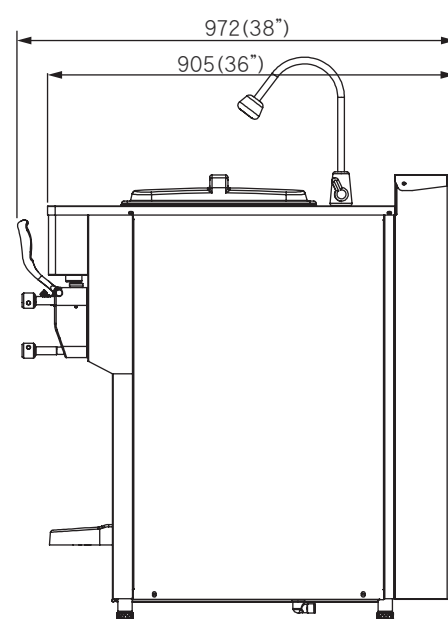

RIGHT SIDE

## Specification

| Model      | Mix Hopper Capacity     | Cylinder Capacity       | Consecutive Dispensing | Dasher Motor   | Max. Production                |
|------------|-------------------------|-------------------------|------------------------|----------------|--------------------------------|
| ISI-271THN | 12.5 liter (3.3 gallon) | 2.7 liter (0.72 gallon) | ∞ cups (100 cc/3.5 oz) | 0.65 KW        | 13 kg (29 lbs/h)               |
|            | First Dispensing        | Power Consumption       | Compressor Capacity    | Cooling System | Electrical Option              |
|            | 6~8 min                 | 2,200 W                 | 1.5 HP (R-404A)        | Air-Cooled     | 230V/50Hz/1PH<br>220V/60Hz/1PH |

※ Production Capacity may vary depending on ambient temperature.


## Detail View



Simple & Easy to access operating / control system on the front LCD touch panel



Pull out to remove the Air filter at the bottom of the front side

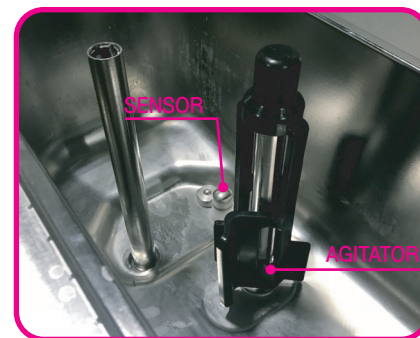

Agitator Operation  
Automatically Detect MIX OUT & MIX LOW by the sensor

※ Design and Specification are subject to change without notice.